



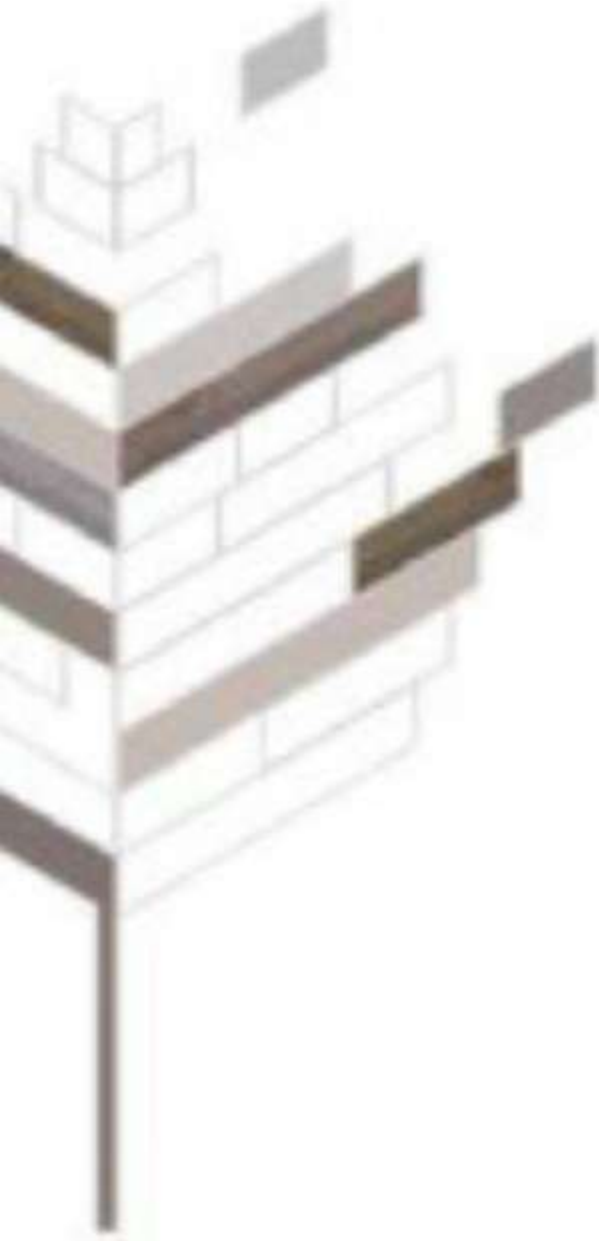

skyFlor


SkyFlor 5 & 6 mm engineered SPC (eSPC)

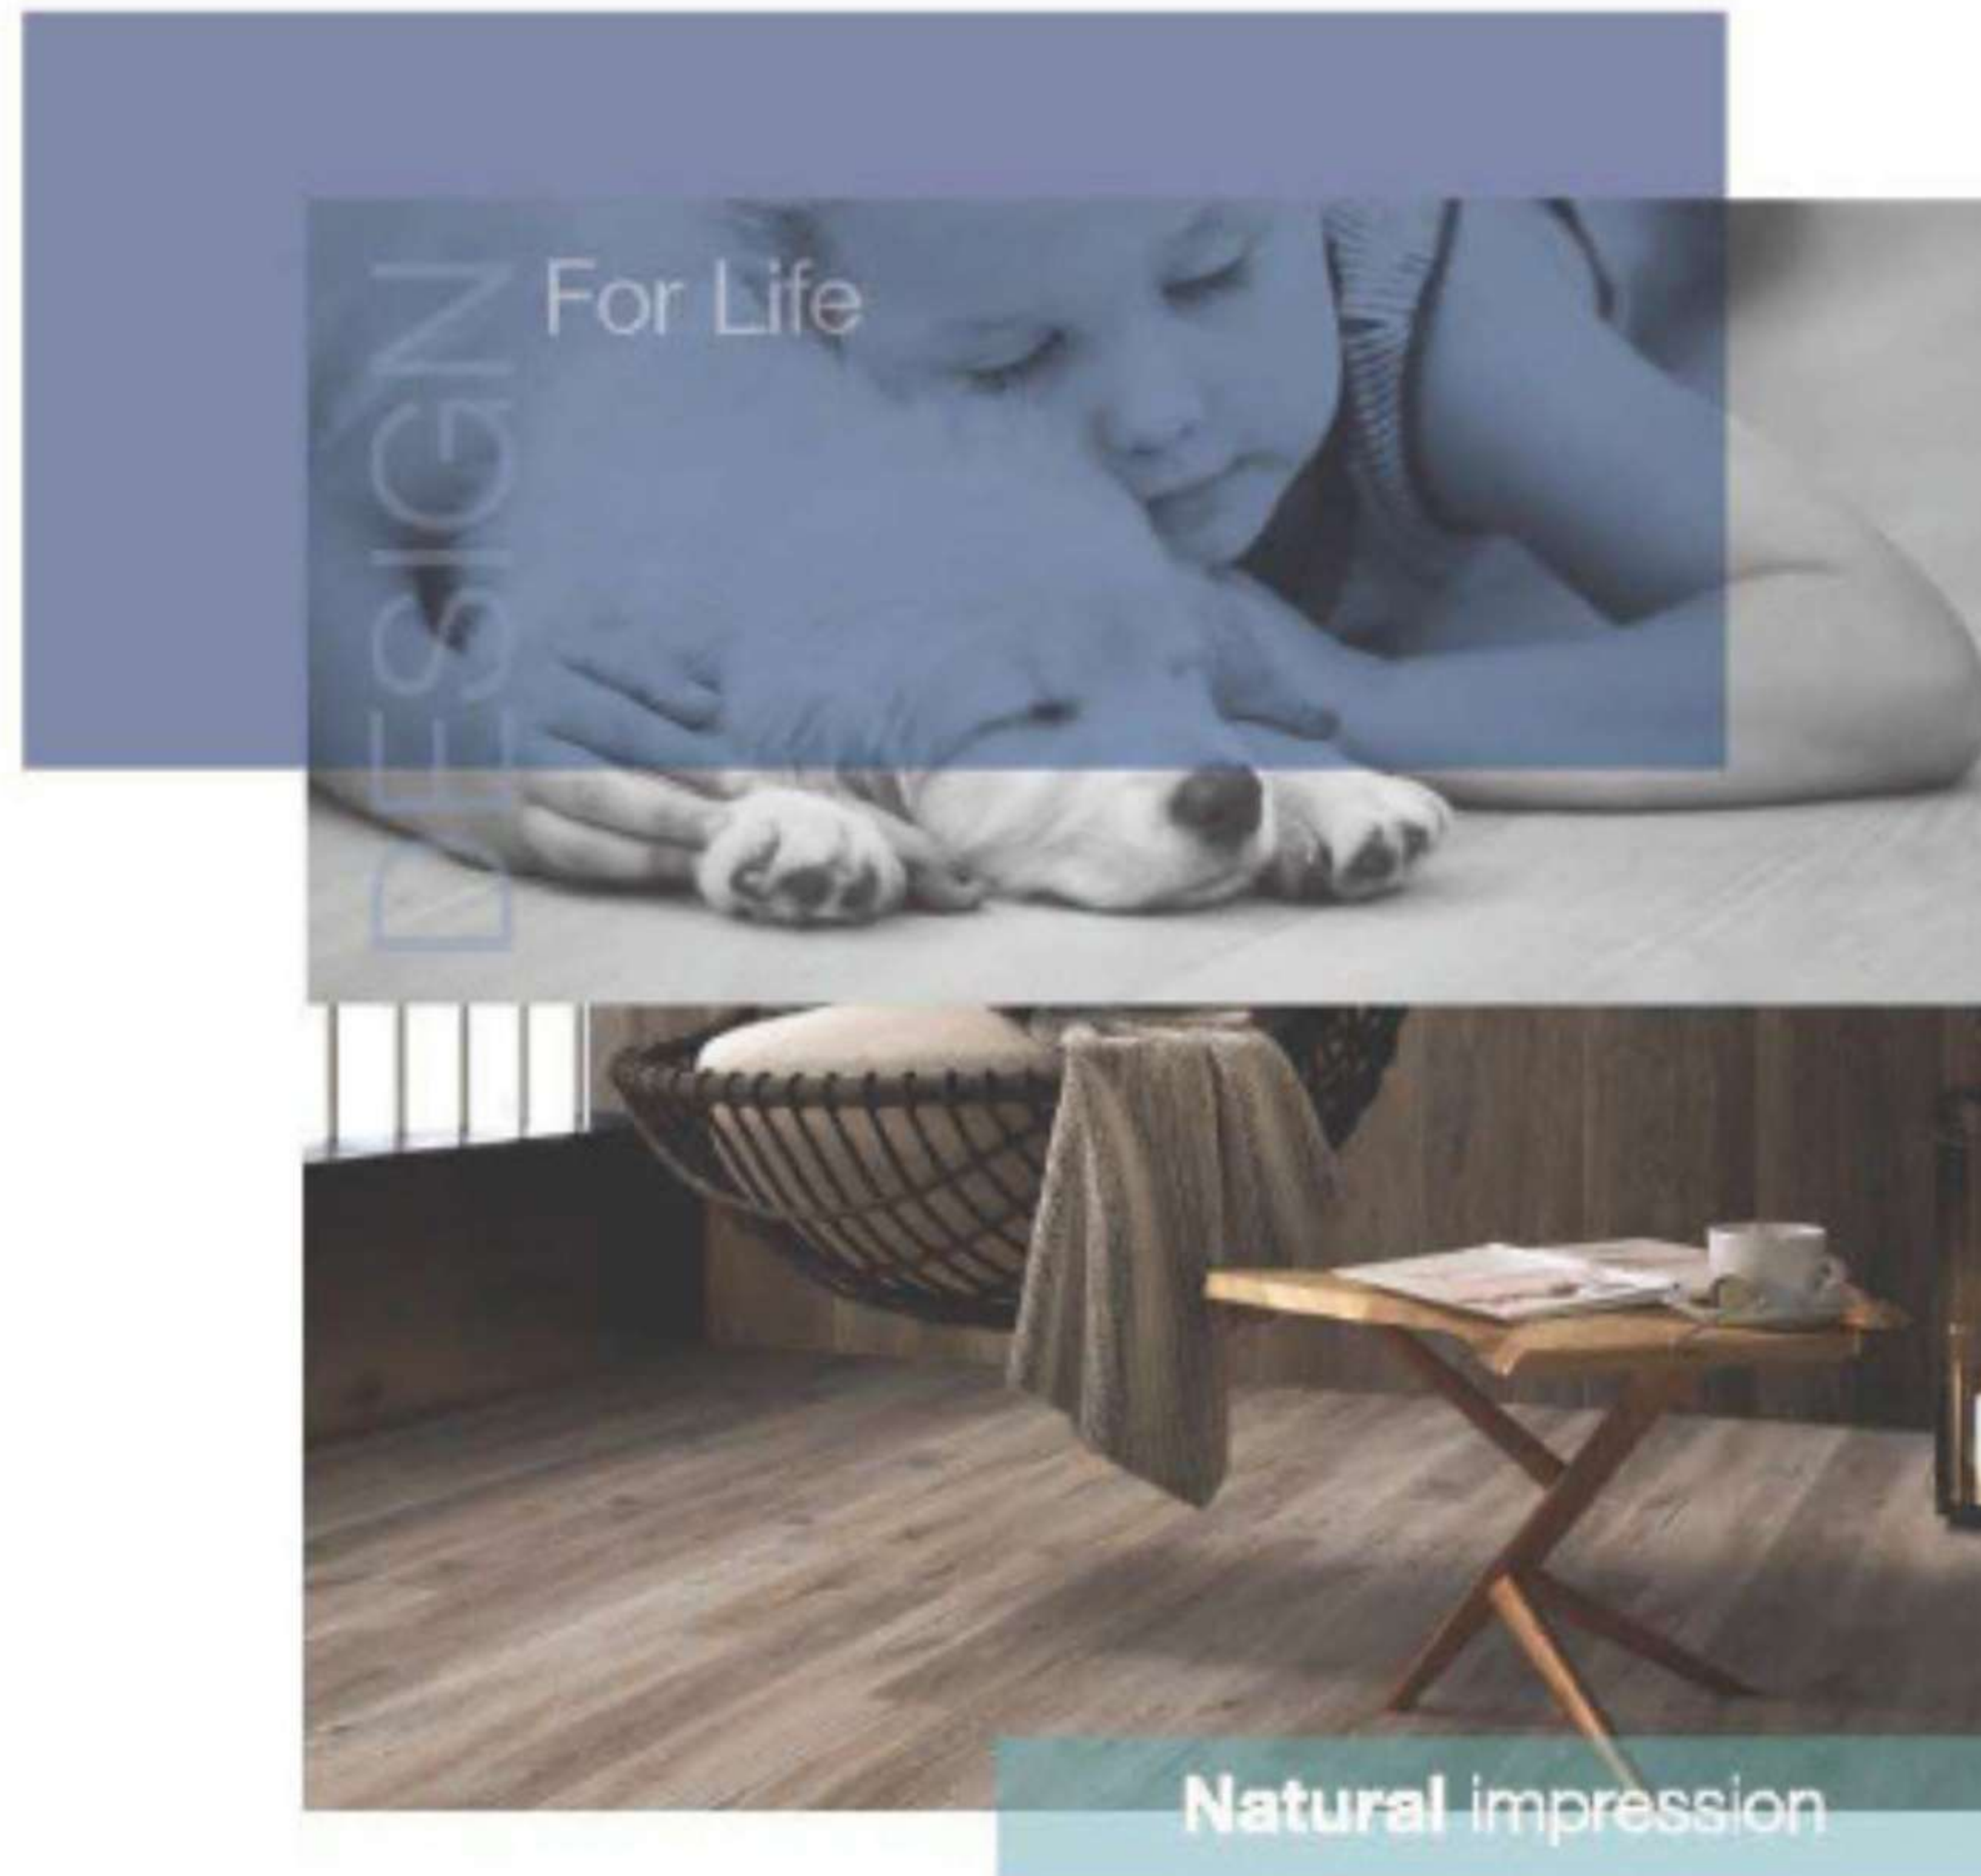

SPC flooring is designed to have one layer SPC core; where as eSPC, through advanced engineering adds vinyl sheets to this layer, resulting in improvements in dimensional stability, enhanced sound absorption and increased underfoot feel comfort.

eSPC brings the best of both worlds together by adding the soft touch of Vinyl flooring without compromising the rigid character from SPC flooring.

World Class eSPC Flooring

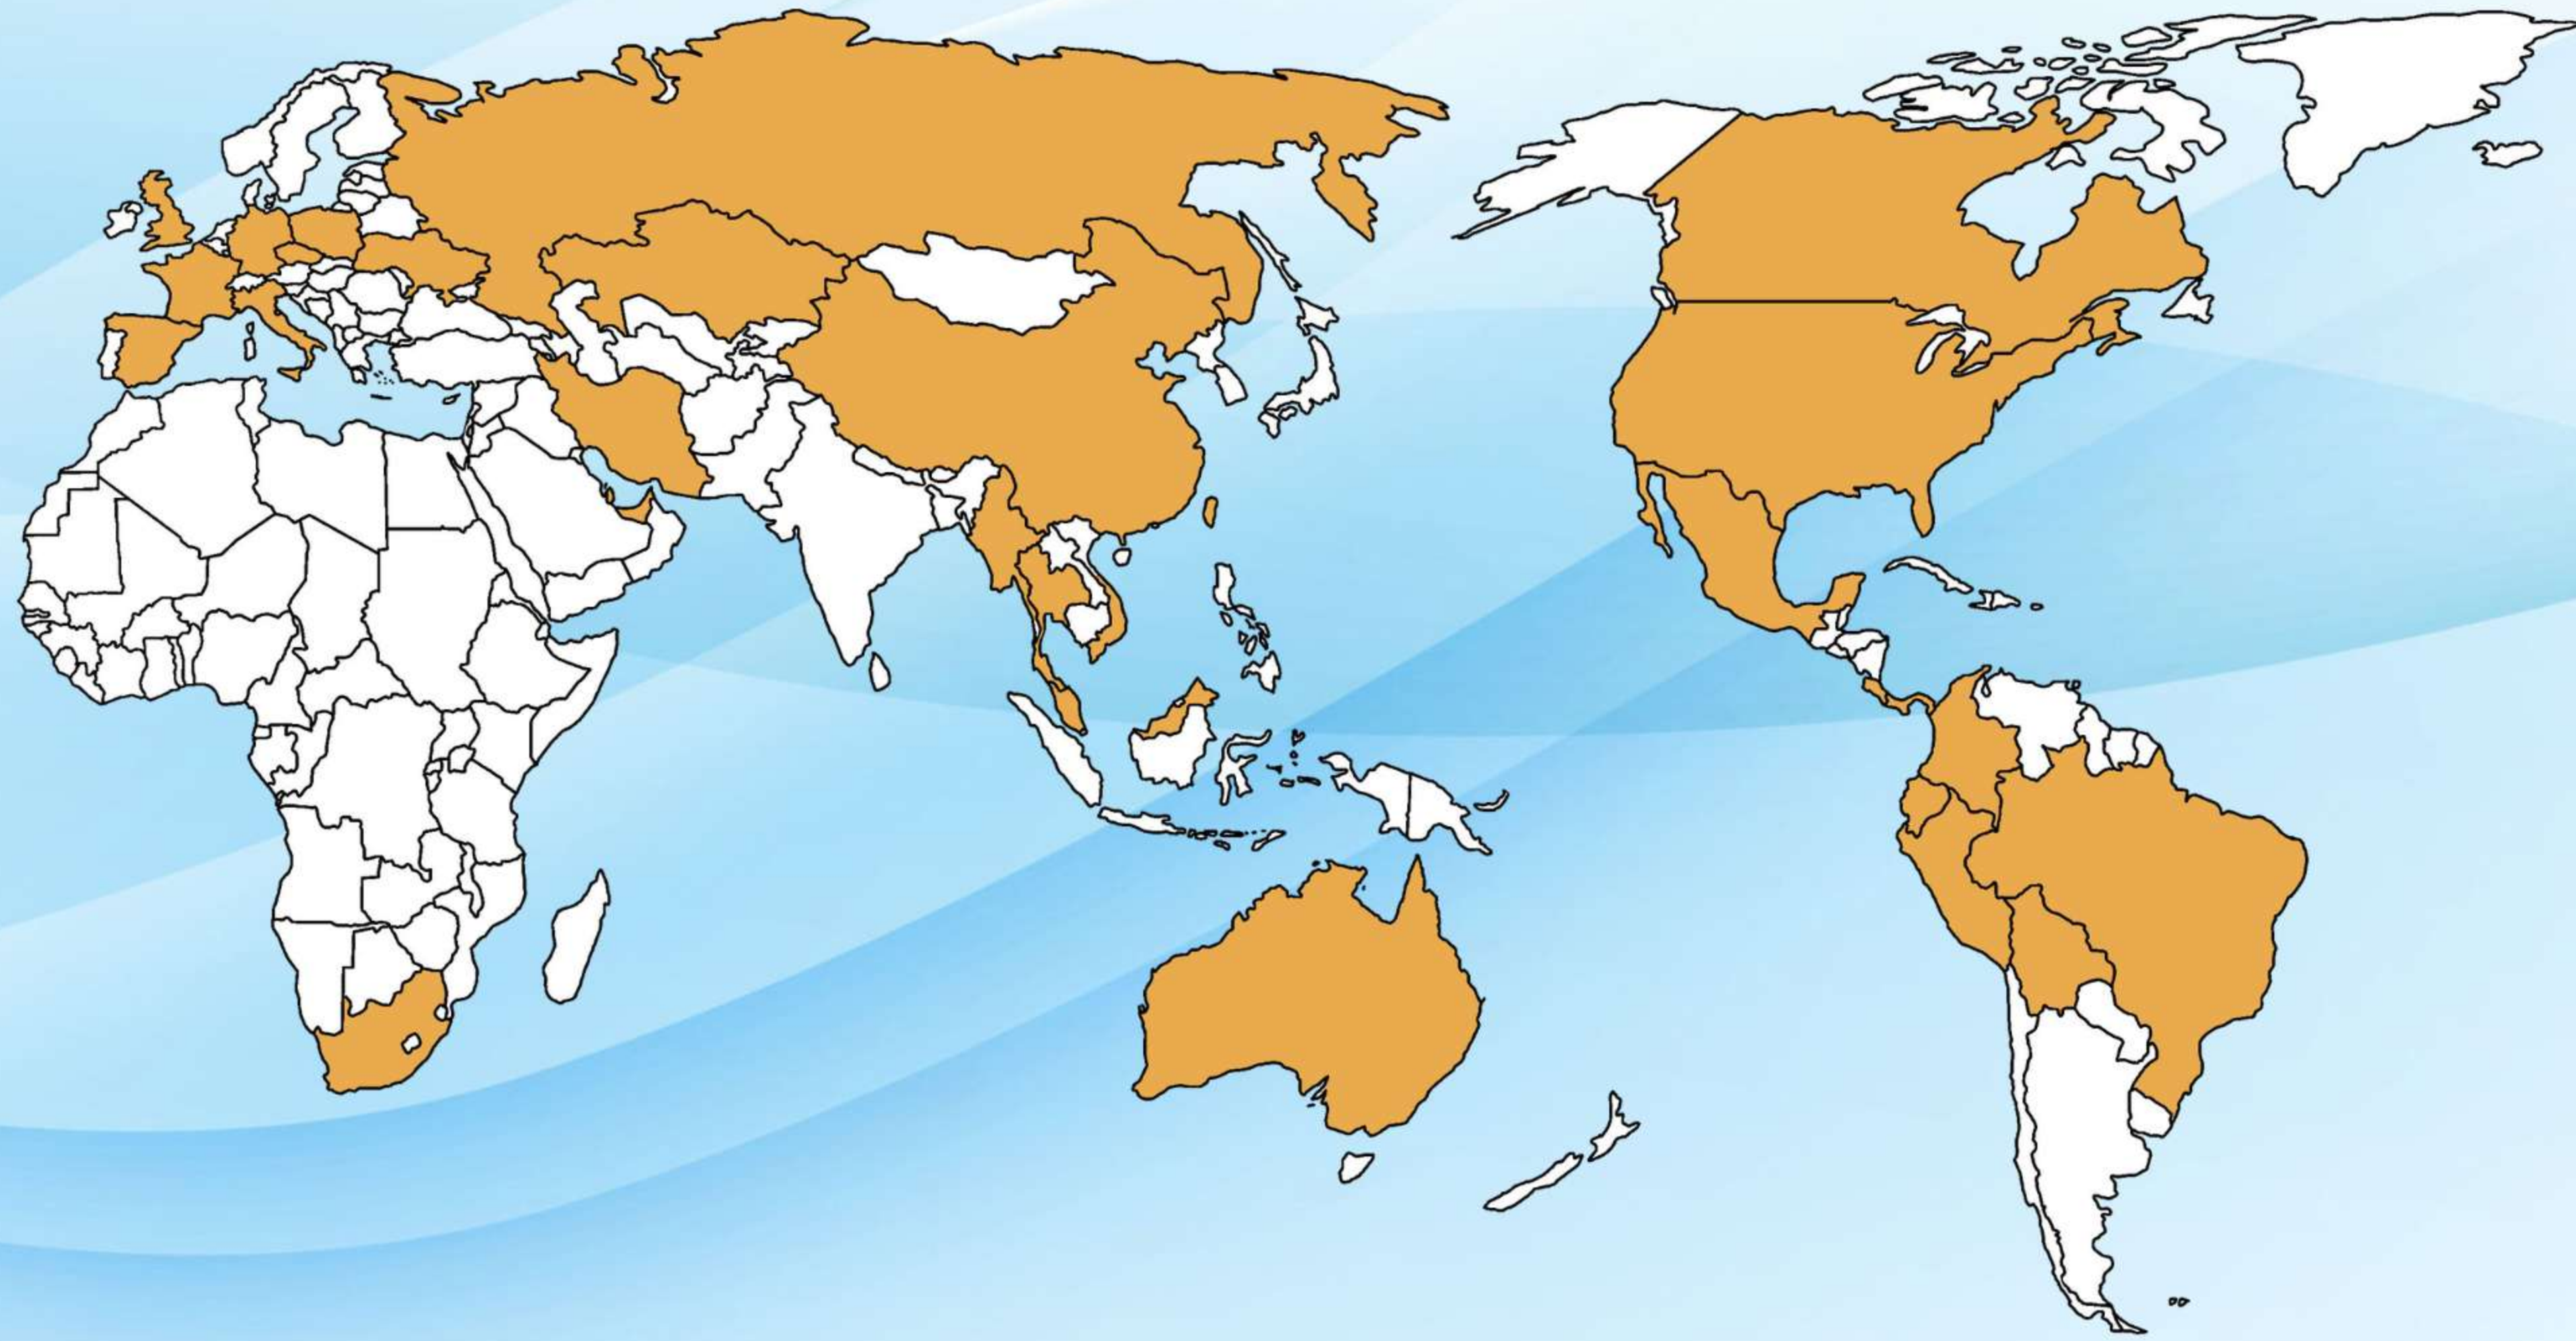

eSPC Flooring, trusted by over 30 countries

石塑地板，30 多个国家信赖的产品

Double Diamond
UV coating

wearlayer


decor film

LVT Sheet

SPC Core

LVT sheet

UNICLIC lock system

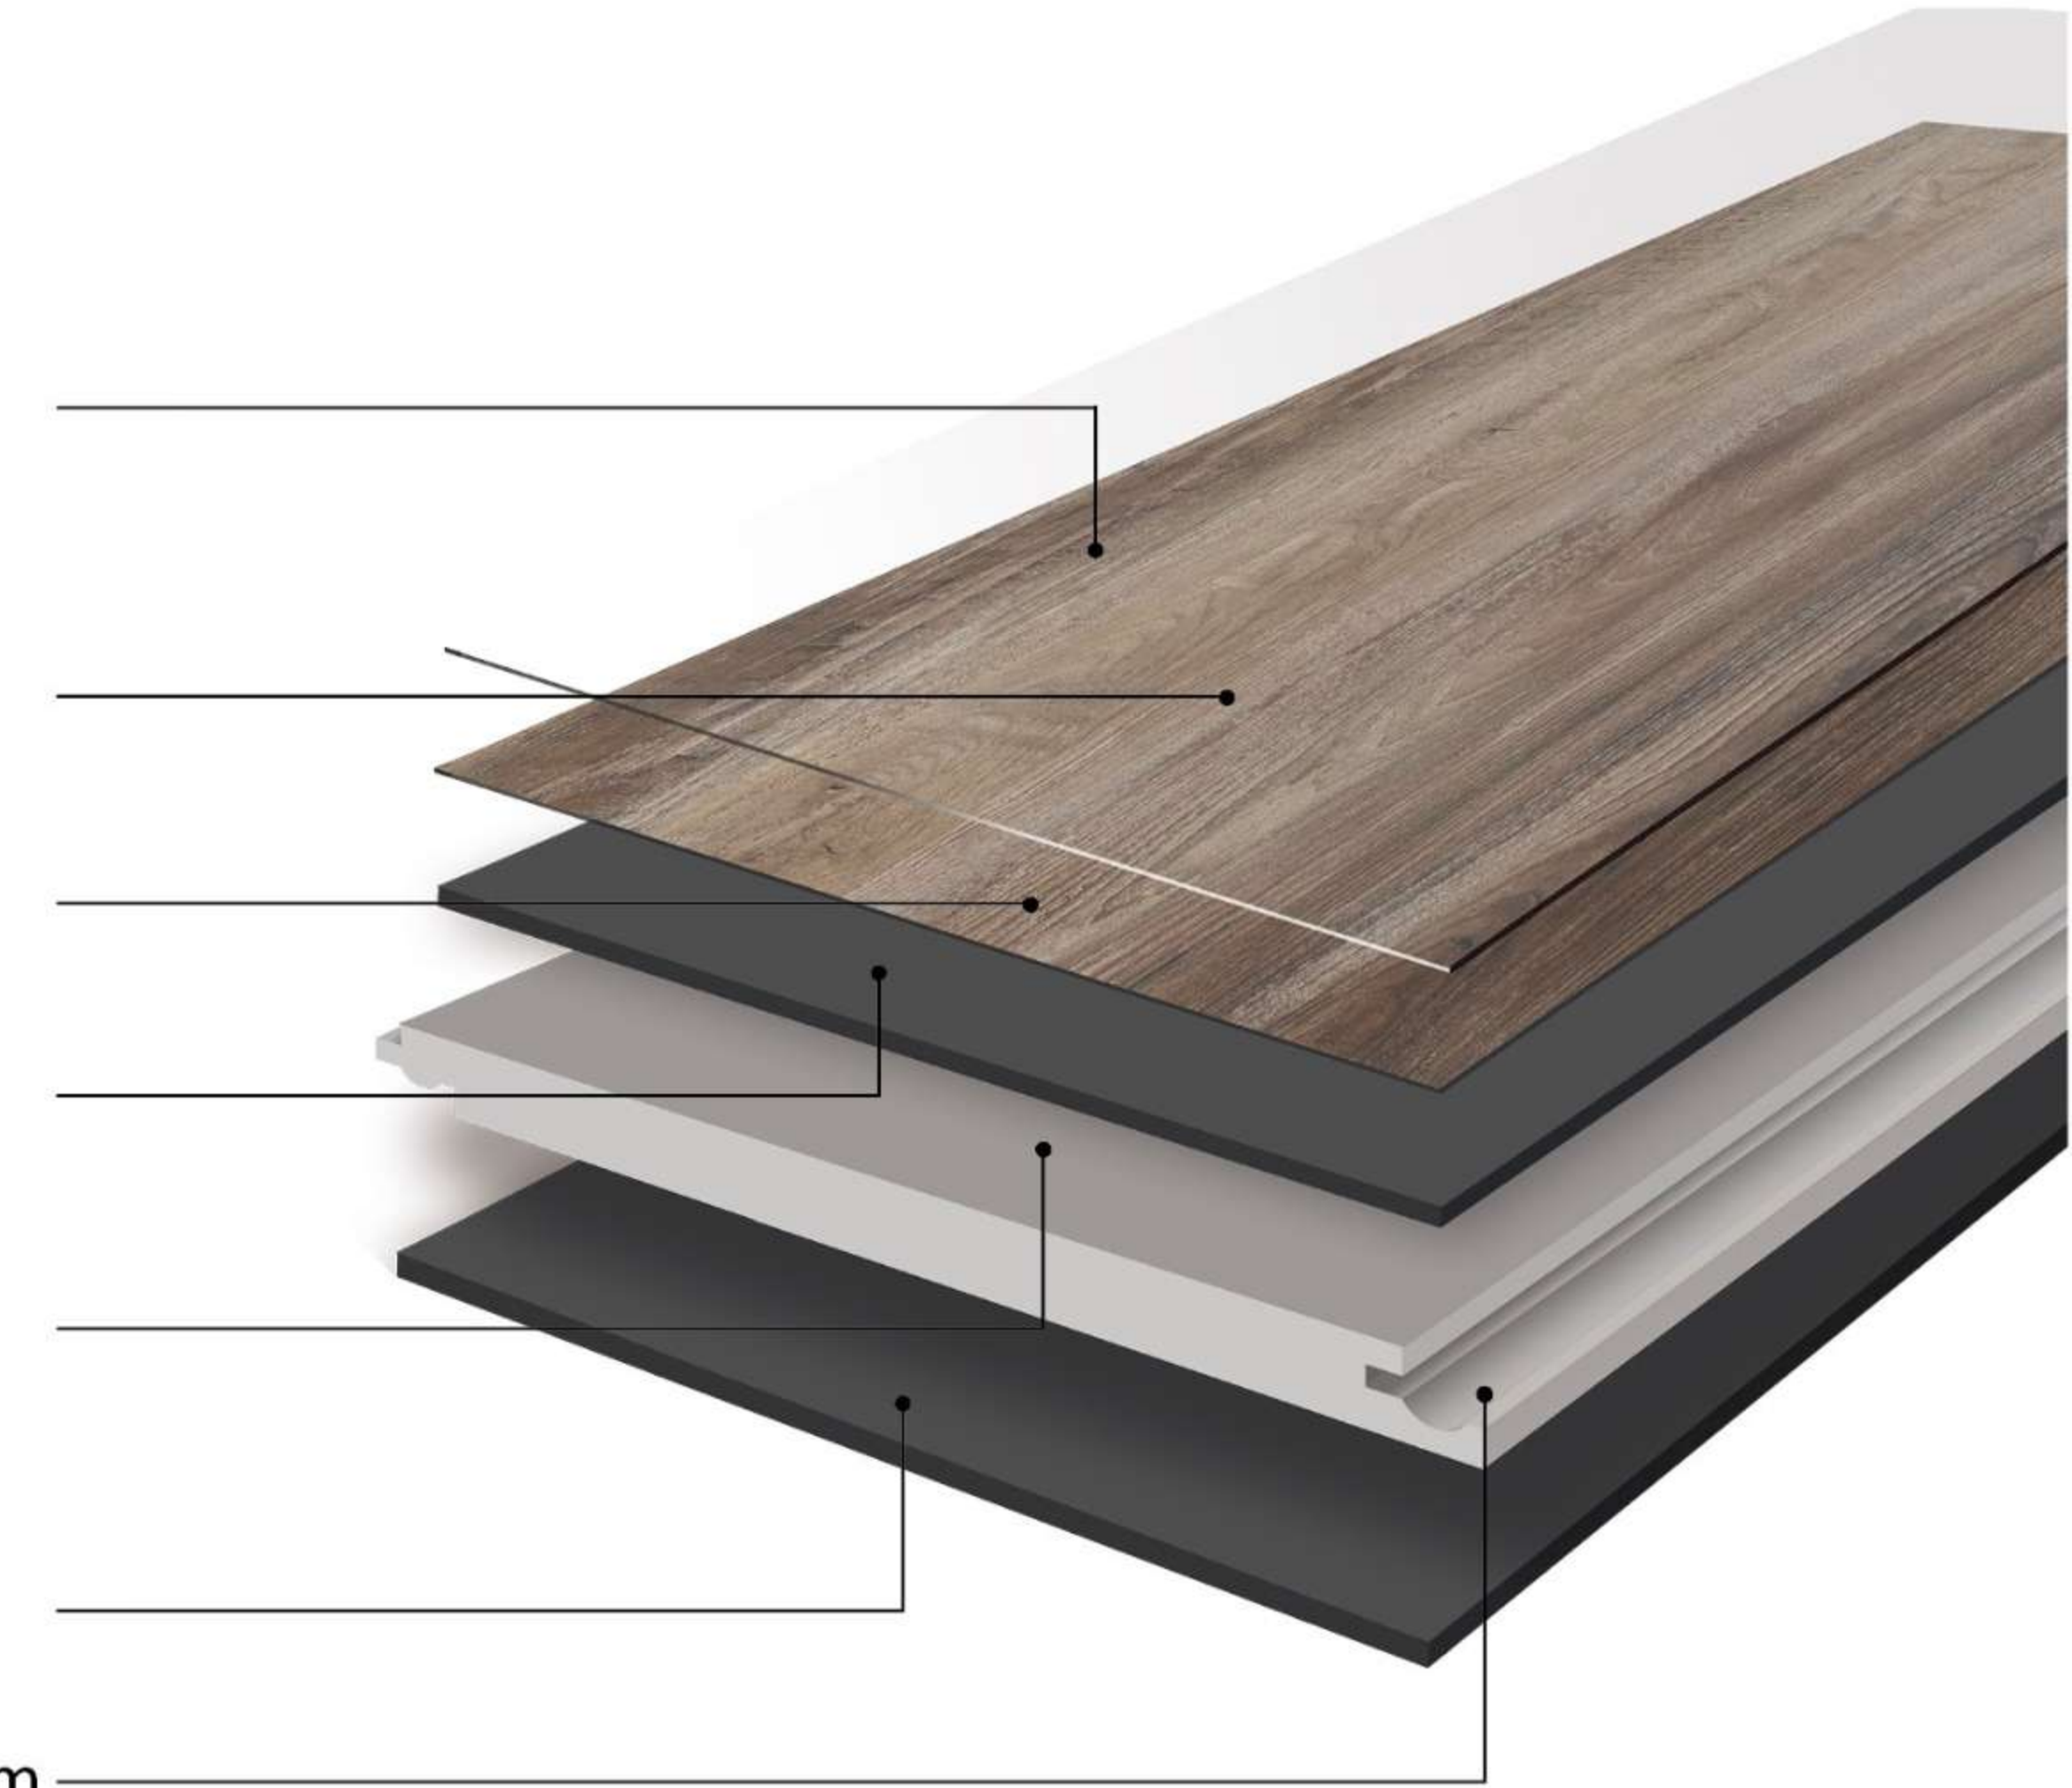

Antistatic



Antiskid



Fire
Behavior



5 mm




ISO 9001
Quality system certified

ISO 14001
Environmental system certified

EN 685



EN 685

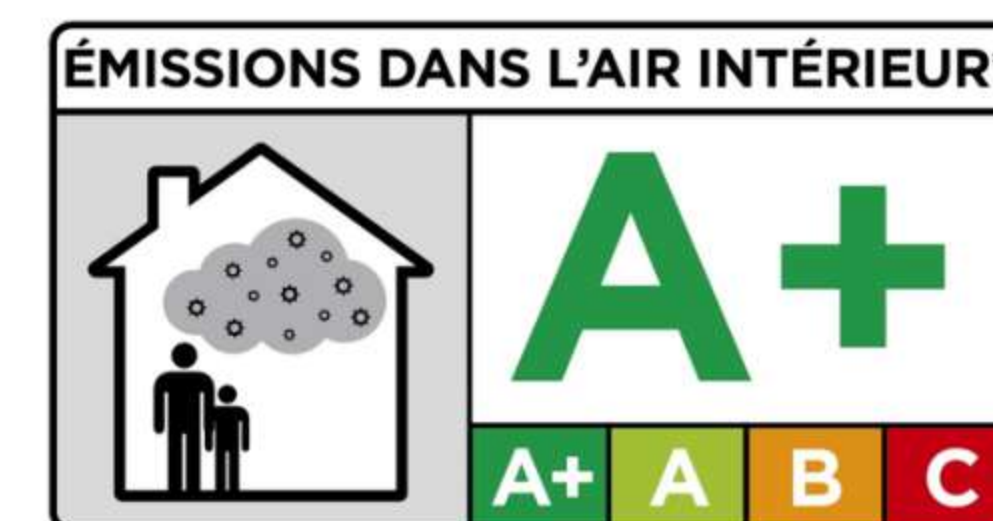

CERTIFIED BY
SCS Global Services

Deutsches
Institut
für
Bautechnik





B61 Oberon Walnut



B61 Oberon Walnut



D61 Dysnomia Oak



D61 Dysnomia Oak



G61 Euporie Ash



G61 Euporie Ash



M61 Miranda Maple



M61 Miranda Maple



Y61 Europa Oak

Y61 Europa Oak



B51 Cosmos Walnut



B51 Cosmos Walnut



D51 Black Eye Oak



D51 Black Eye Oak



G51 Milky Way Ash



G51 Milky Way Ash



M51 Cartwheel Maple



M51 Cartwheel Maple



Y51 Andromeda Oak



Y51 Andromeda Oak



HY11 Messier Oak



HY11 Messier Oak



HM11 Cygnus Maple



HM11 Cygnus Maple



SQ11 Murchison



SQ11 Murchison



SQ21 Yardymly



SQ21 Yardymly



SQ31 Tamdakht



SQ31 Tamdakht



SQ41 Allende



SQ41 Allende

Certificates



SkyFlor eSPC Specifications		
CLASSIFICATION		
Fire class	EN 13 501-1	Bfl-s1
slip resistance	EN14041	R10
PERFORMANCES		
PCP	FD CEN/TR14823:2006	NOT DETECTED
Colour fastness to light	EN ISO 105 B02	6
Phthalate Test	ASTM D3421	NOT DETECTED
ROHS	2011/65/EU	NOT DETECTED
Staining Resistance	En423	NOT DETECTED
Dimensional stability	ASTM F 2199-09	WIDTH 0.02/LENGTH 0.04%
High temperature warping	EN434	0.3mm
Squareness	ASTM F2055	SHORT 0.03,LENGTH 0.09mm
Length	En427	0.25mm
Width	En427	0.15mm
Thickness	En428	0.15mm
Peel Strength	En431	0.5MM,>70N
Effect of a castor chair	En425	NO VISIBLE DAMAGE
VOC emission	DIN EN ISO16000-9	PASS
Residual indentation	ASTM F1914	0.40%
Resistant to Chemicals	ASTM F925	NO CHANGE
Resistant to heat	ASTM F1514	0.49ΔE*
Resistant to light	ASTM F1515	0.87ΔE*
Static coefficient of friction	ASTM C1028	DRY 0.94 WET 0.68
Static load resistant	ASTM F970	0.04mm
Thermal Conductivity	ASTM C518	0.163w/ m·k
Thermal Resistance	ASTM C518	0.033(m ² ·k)/w
ENVIRONNEMENT / VOC		
VOC Emission	DIN EN ISO16000-9	PASS