



skyFlor

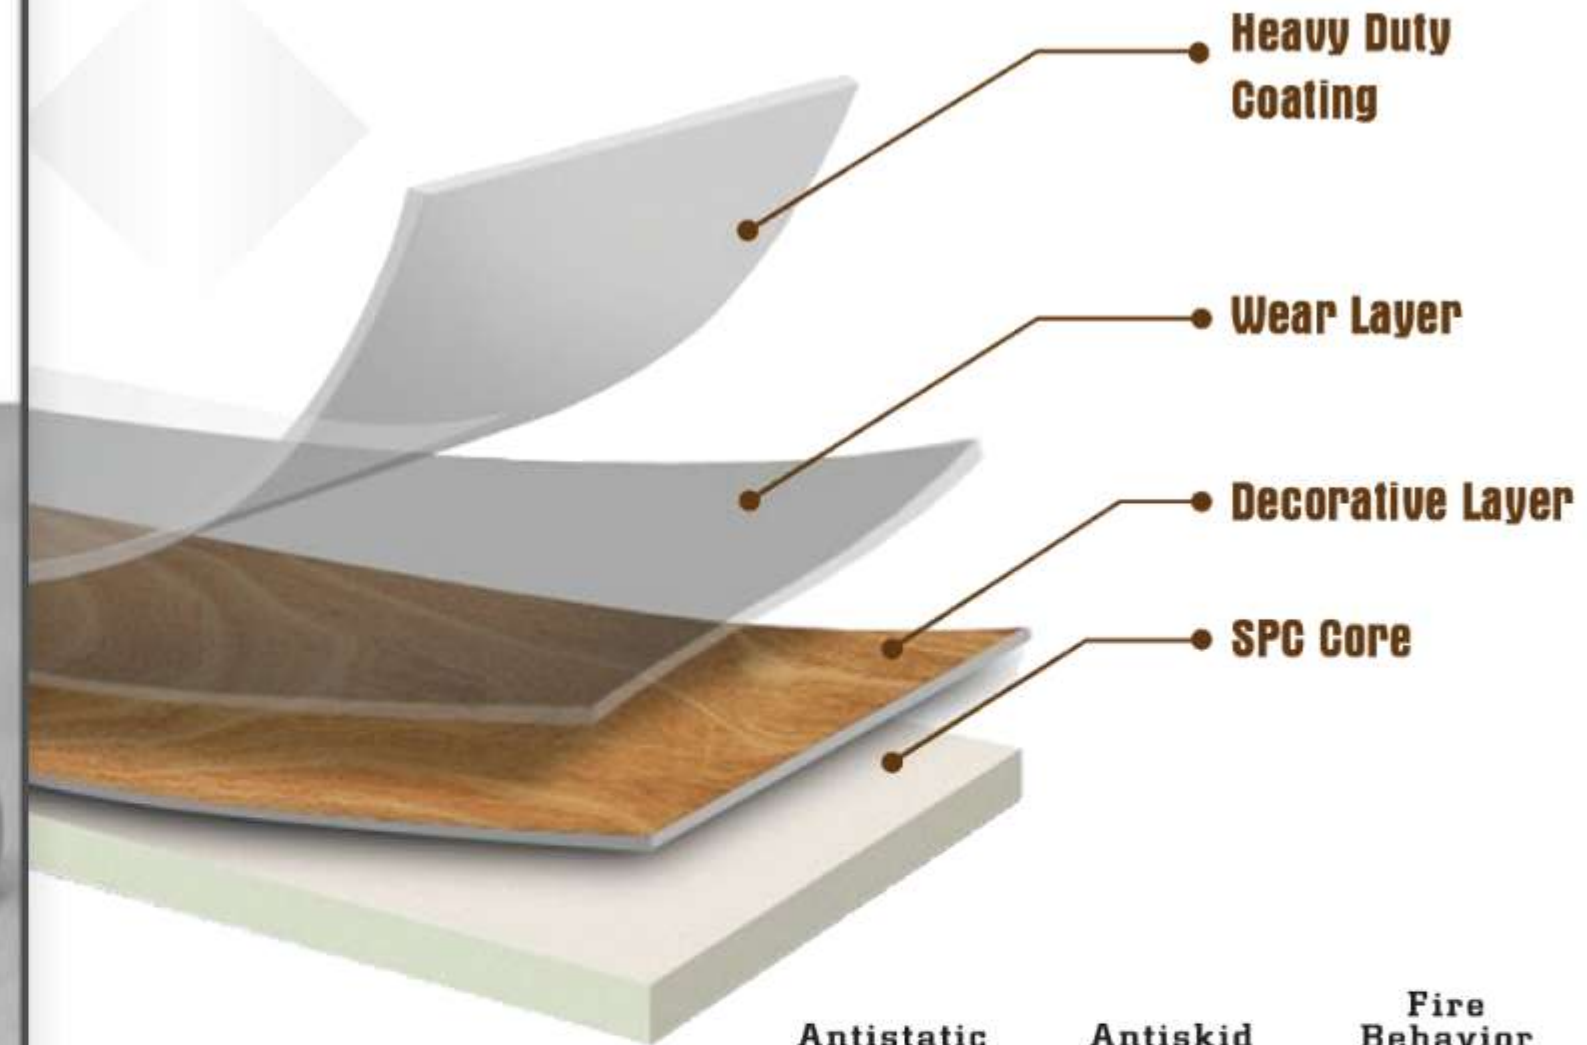

Antistatic

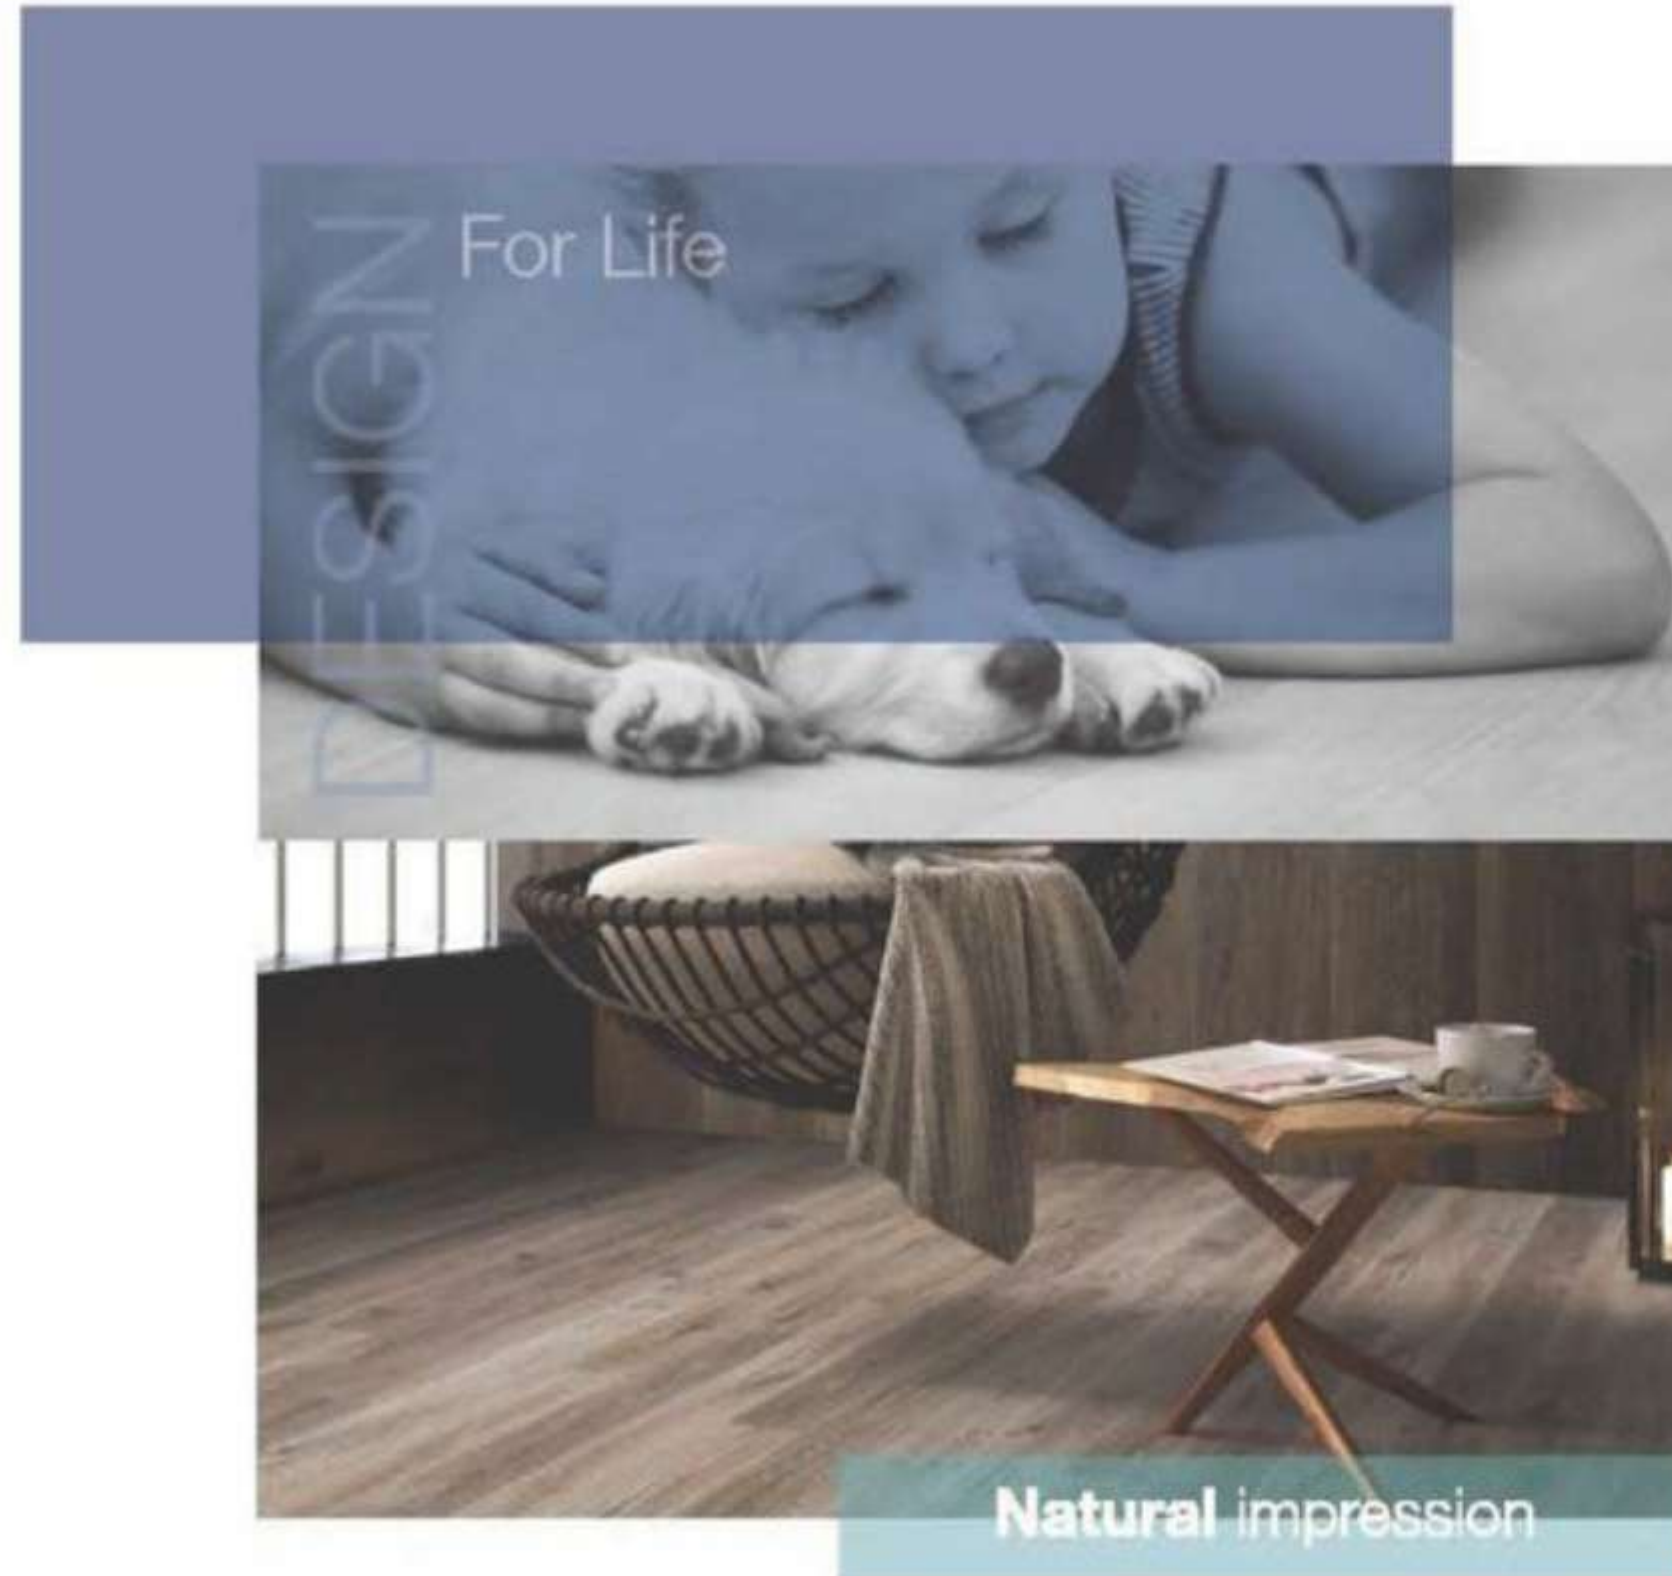

Antiskid




Fire Behavior



1219 mm



4 mm / 5 mm



8 Pieces



ISO 9001

Quality system certified

ISO 14001

Environmental system certified

EN 685



EN 685



CERTIFIED BY
SCS Global Services

Deutsches
Institut
für
Bautechnik





B41S • B51S Ceres Walnut



B41S • B51S Ceres Walnut



D41S • D51S Orcus Oak



D41S • D51S Orcus Oak



G41S · G51S Pluto Ash



G41S · G51S Pluto Ash



M41S • M51S Sedna Maple



M41S • M51S Sedna Maple



Y41S • Y51S Eris Oak



Y41S • Y51S Eris Oak

Certificates



SkyFlor SPC Data Sheet		
Fire class	EN13501-1	Bfl-s1
Slip resistance	EN14041	R10
Wear resistance	NALFA LF 01-2011	IP-4000 cycles
Effect of a castor chair	EN425	NO VISIBLE DAMAGE
Colour fastness to light	EN ISO 105 B02	6
Staining resistance	EN423	NOT DETECTED
PCP	FD CEN/TR14823:2006	NOT DETECTED
Phthalate test	ASTM D3421	NOT DETECTED
ROHS	2011/65/EU	NOT DETECTED
VOC emission	DIN EN ISO16000-9	PASS
Peel strength	EN431	0.5MM,>50N
Dimensional stability	ASTM F 2199-09	WIDTH 0.05/LENGTH 0.08%
High temperature warping	EN434	0.5mm
Squareness	ASTM F2055	SHORT 0.03,LENGTH 0.09mm
Length	EN427	0.25mm
Width	EN427	0.15mm
Thickness	EN428	0.15mm
Residual indentation	ASTM F1914	0.40%
Resistant to chemicals	ASTM F925	NO CHANGE
Resistant to heat	ASTM F1514	0.49ΔE*
Resistant to light	ASTM F1515	0.87ΔE*
Static coefficient of friction	ASTM C1028	DRY 0.94 WET 0.68
Static load resistant	ASTM F970	0.04mm
Thermal conductivity	ASTM C518	0.163w/ m·k
Thermal resistance	ASTM C518	0.033(m2·k)/w